


SEAL / LEAK TESTER

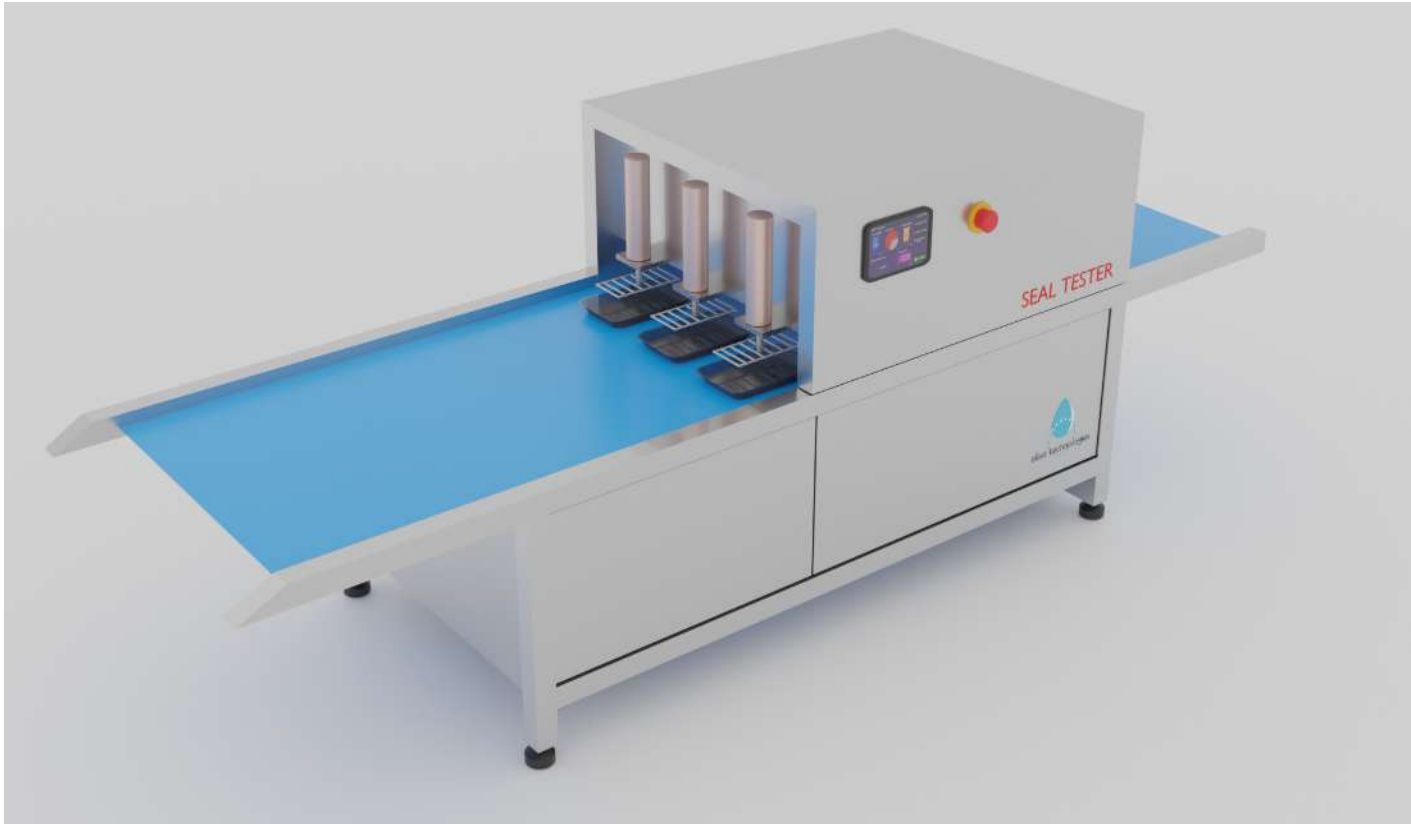

The seal or leak tester can be used to find leaks and seal strengths of MA gas flushed trays, bowls and pouches. These tests can also detect the over pressure and under pressure of the packets. If any trays / bowls / pouches detected with leakages, will be rejected automatically.

Technical Specifications

Type	Seal / leak tester
Cycles	Upto 60 packs / min
Package Type	Pouch / Tray / Bowl
Testing Mode	Automatic
Testing Time (per cycle)	2-10seconds
Power Supply	240 V AC single phase
Machine Weight	Approximately 100 kg

Features

- Up to 30 packs/min can be test
- Under gas & over gas can be identified.
- Seal faults, small holes (<0.3mm) can be detected.
- Auto rejection for leak packs.

Benefits

- Continuous conveyor mode.
- Digital touch screen control.
- New products setup.
- Stainless steel / Aluminium construction.